




TECHNICAL PROPERTIES



EN388

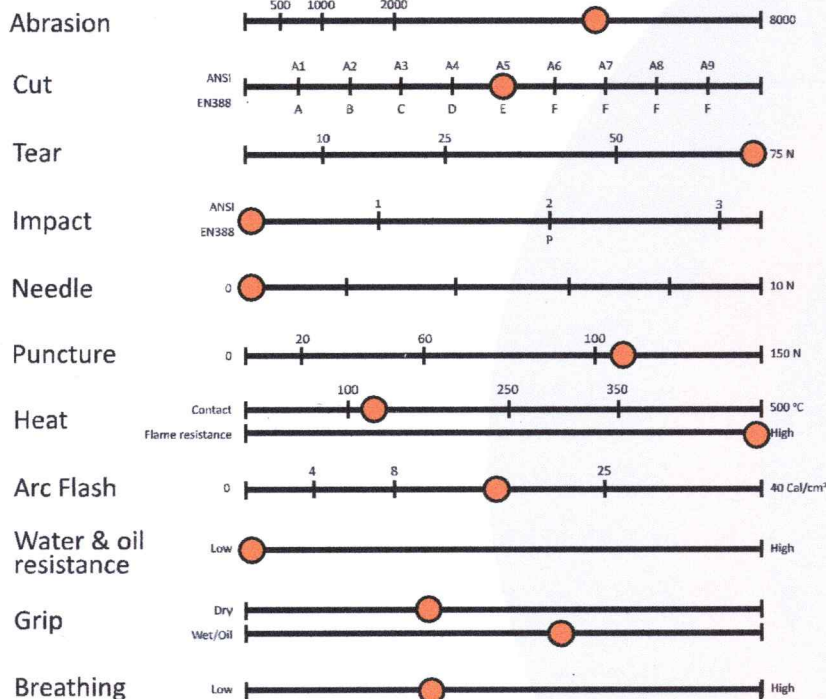

3X43E

EN407



41324X

ARC FLASH

ASTM F2675, ATPV=

16 Cal/cm² (back of hand)

30 Cal/cm² (palm)

NFPA 70E=

Level 2

ISO (A-F)
A | > 2 N
B | > 5 N
C | > 10 N
D | > 15 N
E | > 22 N
F | > 30 N



ART.NO: 13-4HFR-AF
60 pairs (5 dozen)/Carton

CE
CAT II

7	8	9	10	11	12
XS	S	M	L	XL	XXL