




TECHNICAL PROPERTIES



EN388

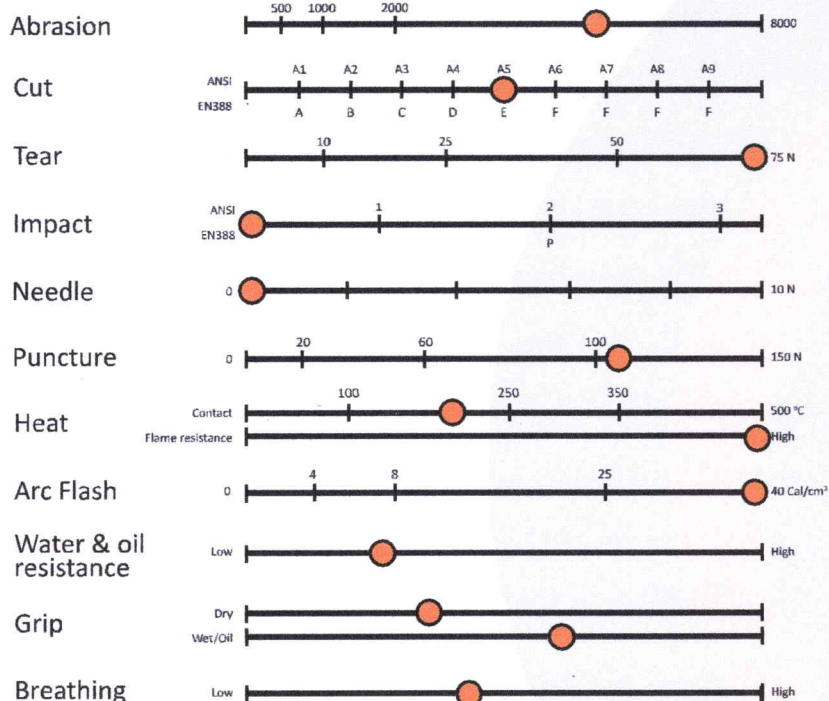

4X42E

EN407



4131XX

ARC FLASH

ASTM F2675, ATPV=

59 Cal/cm² (back of hand)

42 Cal/cm² (palm)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



CE 1493
CAT III

ART.NO: 13-4HAF-50
12 pairs (1 dozen)/Carton

8	9	10	11	12
S	M	L	XL	XXL